



Reclaim-PRO™ Lubricant Purification and Recycling Units

Green, Lean and Cost-Effective

Improve your bottom line and environment by reclaiming oils instead of disposing as waste. Our Reclaim-PRO coolant purification systems are known for reducing lubrication requirements by as much as 70% while also decreasing machine downtime. Our approach relies on polypropylene coalescing plates to separate oil from coolant or water by utilizing the buoyancy of the oil droplets. This helps eliminate disposal issues as no absorbents are used in the process.

Reclaim-PRO System Features


- Proprietary simulation process used to custom design each separator
- 10+ years of field life and easy maintenance
- Low operating and maintenance costs
- Gravity-operated, no utilities are required
- Recyclable oil recovered
- Predictable performance
- Cleanable coalescing plate system
- No absorbents required
- For use with hydrocarbons or vegetable oil lubricants
- Various accessories available such as pumps, controls, coolant addition systems, etc.



| System | Type | Output Capacity | Media Stacks | Dimensions W x L x H |
|------------------|----------------------|-----------------|--------------|----------------------|
| Reclaim-PRO MINI | Portable | .3 to .7 gpm | 0.5 | 8 x 28 x 19 |
| Reclaim-PRO I | Fixed | .6 to 1 gpm | 1 | 15 x 51 x 22 |
| Reclaim-PRO II | Fixed w/fork pockets | 2.4 to 4 gpm | 4 | 29 x 100 x 34 |
| Reclaim-PRO III | Fixed w/fork pockets | 5 to 10 gpm | 9 | 41 x 100 x 42 |

Additional System Offerings

PRO-MIX Proportional Mixing Stations

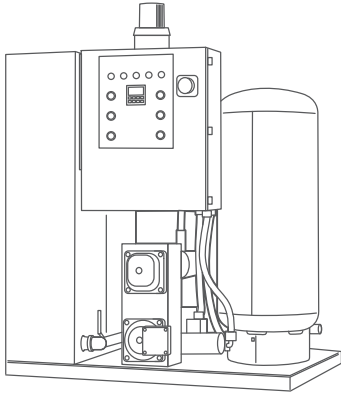

PRO-MIX I

Compact, gravity-fed mixing station for smaller facilities.

PRO-MIX III

Simple, gravity-fed station with 20-gallon lubricant mixture capacity.

PRO-MIX V

Pump-operated station offering one-mixture of lubricant.

PRO-MIX V Dual

One lubricant type can be mixed at two different mixing stations, each at a different ratio.


PRO-MIX V Double

Designed to mix and store blends from two different lubricant types.

PRO-MIX V Triple

One lubricant type can be mixed at three different mixing stations, each at a different ratio.

SPRA-RITE Application Systems

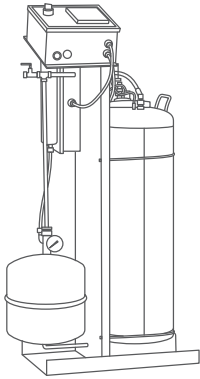

High Pressure Pedestal

For thick, emulsified lubricants and rich dilution.

Low Pressure Pedestal

For application of a wide variety of lubricants.

Alpha

Effective turnkey lube application solution suited for smaller pressrooms.

Ultra-Lube

For atomizing of highly viscous lubricants into ultra-fine spray.

COMPONENTS

Manifolds

- 2, 4, 6, 8, 10 injectors
- Quick Change Die manifolds offer “one-click” disconnect and connect of multiple hoses to die

Controls

Alpha


- Independent control of up to 6 injectors for volume and stroke

Beta


- Independent control of up to 48 injectors for lubricant volume, stroke count, time delay
- 200 pattern spray profiles
- Automatic or manual control

Nozzles

- Patented SPRA-RITE HP or Ultra-Fine
- 99.5% drip-free



Reclaim-PRO Purification and Recycling Units

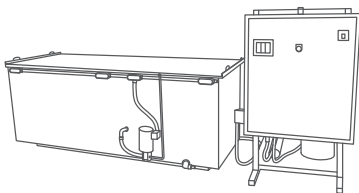

Coolant purification systems separate oil from water, helping reduce lubrication requirements by as much as 70% while also decreasing machine downtime. In four different sizes.

Reclaim-PRO 5

Reclaim-PRO 11

Reclaim-PRO 22

Reclaim-PRO 33

2936 Dormax Street SW
Grandville, Michigan 49418
+1 (616) 249-1525

US PAT NO'S: #6,425,433; #4,547,128; #5,531,085; #5,855,321
© 2014 Industrial Innovations Inc. All rights reserved. Produced by industry-scope.com

