



SPRA-RITE™

Lubricant Injector System Process Controller

User-Friendly, Flexible Control

SPRA-RITE Controls utilize an interface to define, manage, and store the critical process variables associated with the control of the lubricant application process. The volume of lubricant and stroke count are loaded into each of the injectors independently using touch key controls. Existing programs are easily edited using the menu prompts and the touch keys. SPRA-RITE's design provides our customers the unique ability to custom design a lubricating system to meet their specific process requirements.

SPRA-RITE Lubricant Injector System Process Controller Features


- SPRA-RITE injector manifold models are available and stackable in 2, 4, 6, 8 and 10 injectors
- Key switch lock out for process security
- HOT key programming of the spray process parameters
- 200 part storage recipes
- Independent skip cycle counting
- Independent delay spray
- Independent volume control
- Control up to 48 individual spray nozzles
- SPRA-RITE Controls are BCD capable to communicate with certain press controls for automatic spray recipe operation



For less complex applications, we offer our Alpha Processor with capability to control up to 6 injectors for volume and stroke.

Additional System Offerings

PRO-MIX Proportional Mixing Stations

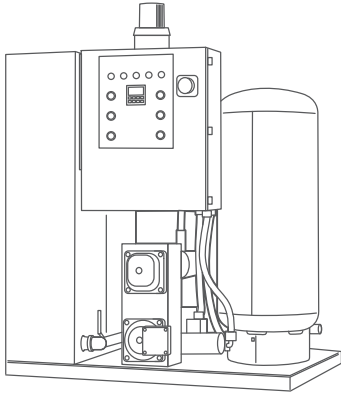

PRO-MIX I

Compact, gravity-fed mixing station for smaller facilities.

PRO-MIX III

Simple, gravity-fed station with 20-gallon lubricant mixture capacity.

PRO-MIX V

Pump-operated station offering one-mixture of lubricant.

PRO-MIX V Dual

One lubricant type can be mixed at two different mixing stations, each at a different ratio.


PRO-MIX V Double

Designed to mix and store blends from two different lubricant types.

PRO-MIX V Triple

One lubricant type can be mixed at three different mixing stations, each at a different ratio.

SPRA-RITE Application Systems

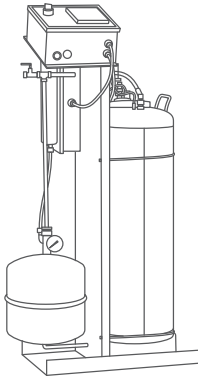

High Pressure Pedestal

For thick, emulsified lubricants and rich dilution.

Low Pressure Pedestal

For application of a wide variety of lubricants.

Alpha

Effective turnkey lube application solution suited for smaller pressrooms.

Ultra-Lube

For atomizing of highly viscous lubricants into ultra-fine spray.

COMPONENTS

Manifolds

- 2, 4, 6, 8, 10 injectors
- Quick Change Die manifolds offer “one-click” disconnect and connect of multiple hoses to die

Controls

Alpha


- Independent control of up to 6 injectors for volume and stroke

Beta

- Independent control of up to 48 injectors for lubricant volume, stroke count, time delay
- 200 pattern spray profiles
- Automatic or manual control

Nozzles

- Patented SPRA-RITE HP or Ultra-Fine
- 99.5% drip-free



Reclaim-PRO Purification and Recycling Units


Coolant purification systems separate oil from water, helping reduce lubrication requirements by as much as 70% while also decreasing machine downtime. In four different sizes.

Reclaim-PRO 5

Reclaim-PRO 11

Reclaim-PRO 22

Reclaim-PRO 33

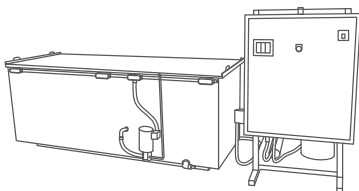

2936 Dormax Street SW
Grandville, Michigan 49418
+1 (616) 249-1525

US PAT NO'S: #6,425,433; #4,547,128; #5,531,085; #5,855,321
© 2014 Industrial Innovations Inc. All rights reserved. Produced by industry-scope.com

